


# Mounting Instructions for CIPA's WING II™ Mirror

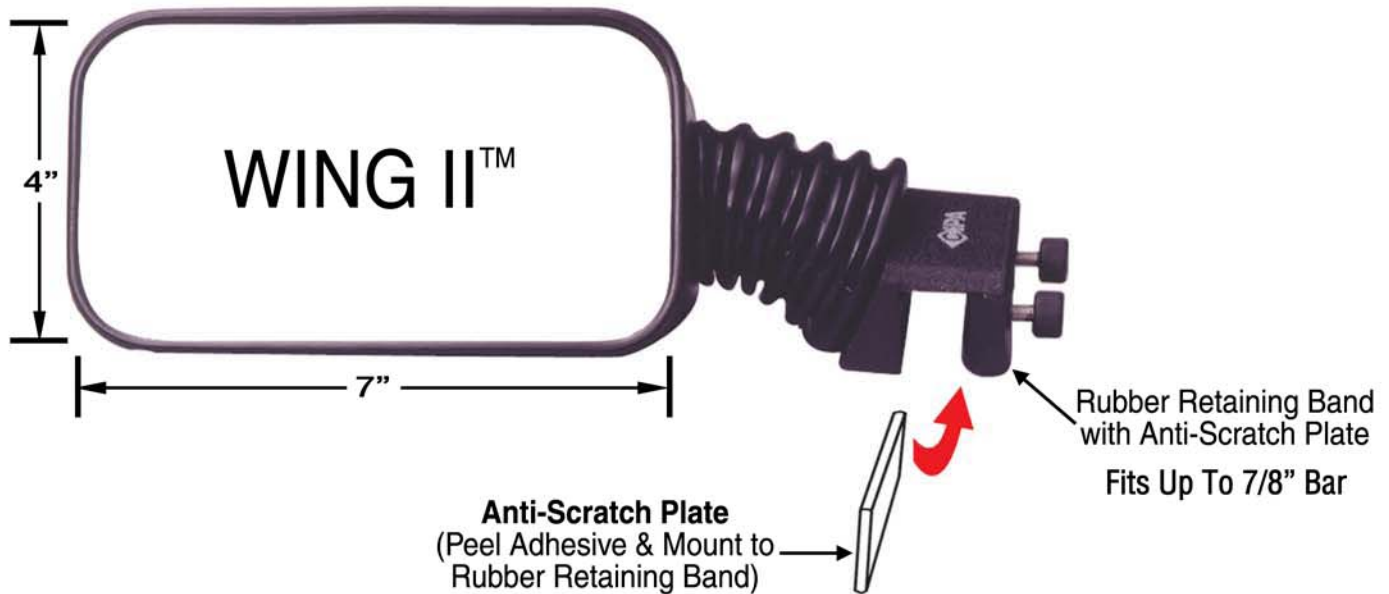

Thank you for your purchase of CIPA's premier universal side-mount mirror, the WING II™. The CIPA WING II™ is for water skiing, tubing, kneeboarding, and general boating safety. The instructions below should help you get the most benefit from your mirror.

## MOUNTING YOUR MIRROR

When you first pull your new mirror out of the package, you will find it extremely difficult to adjust. This is normal. It is important that the ball and socket area remain rigid in order to maintain adjustment. Once you have the mirror installed on your watercraft, and move the mirror head into viewing position, it will remain there securely.

1. Reach into the rubber retaining band of the clamping bracket and remove the anti-scratch plate (see drawing above). Peel back the adhesive backing of the anti-scratch plate and put it back into the rubber retaining band. The adhesive goes on the inside of the retaining band so that the thumb-knobs push against the bare metal of the anti-scratch plate (the side closest to the mirror head).

2. Pull the rubber boot away from the ball and socket area and lightly spray once with WD-40. WD-40 is water-soluble and will evaporate. If you do not have WD-40, use soap and water.

3. Put the clamping bracket portion of the WING II™ mirror over the windshield frame of your watercraft so that the mirror head is on the outside of the frame. Firmly tighten the two thumb knobs.


4. Rotate the mirror head until the lens is in the desired viewing position.

5. Remove the mirror and rinse the WD-40 or soap and water out of the ball and socket area. Remount the mirror to the windshield frame.

## USING YOUR MIRROR

**WARNING:** Objects in the mirror are closer than they appear. Practice getting used to this difference so you can better judge the distances of objects in your mirror.

**NOTE:** There is a screw under the sport boot that attaches the mirror to the clamping bracket. This screw was tightened at the factory, but may become loose. If it does, remove the screw, apply Loc-Tite and re-tighten.

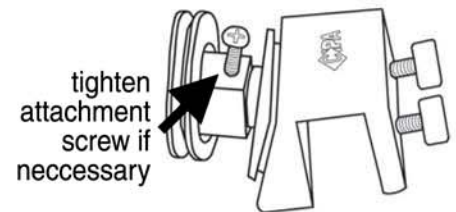

**CIPA-USA, INC.**  
3350 GRISWOLD ROAD  
PORT HURON, MI 48060

[www.cipausa.com](http://www.cipausa.com)